


## 17" PANEL MOUNT LCD MONITOR






**\$1,285.00 USD**

***Model: SV-1701-PM***

- Panel Mount LCD, 17" Industrial Grade
- NEMA 4/IP65 Environmentally Sealed
- Touch Screen Standard (Capacitive or Resistive)
  - Wide Viewing Angles
- 250 Nits of Brightness, Adjustable Controls
- Stainless Steel (NEMA 4X) & Custom painted bezel options
  - VGA & DVI-D video connectors
    - cULus Listed
  - 2 Year Warranty



## GALLERY IMAGES

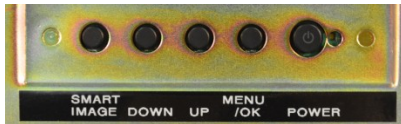

Control Buttons (Rear Mounted)



Connectors (Rear Mounted)

## PRODUCT DESCRIPTION

Stealth builds high quality LCD monitors suited for industrial and commercial applications. Our 17" Panel Mount LCD Monitor comes equipped with an environmentally sealed front panel that is resistant to splashes or hose downs. All Stealth Panel Mount LCD products are easily installed by securing the rear studs into your console, panel or wall.



Prior to shipping, each and every display is put through Stealth's rigorous QA burn-in procedure that is documented and controlled through our ISO 9001 quality system and in compliance with being cULus Listed, [UL 60950-1](#) & [CAN/CSA C22.2](#) No. 60950-1-07.

We offer Panel mount, Rack mount and Open Frame designs as standard off-the-shelf products in 8.4" up to 24" diagonal sizes. Stealth's LCD products are environmentally sealed to NEMA 4 / IP65 and are ideal for applications where dirt, dust, moisture and water are present.

Stealth's [rugged LCD products](#) are constructed from solid steel and stainless steel for corrosion resistance applications. Our LCDs are available with various Touch Screen options including Resistive or Capacitive. For non-touch applications our anti-glare protective glass overlay is installed for maximum protection.

**ADDITIONAL INFORMATION**

<b>Bezel Type</b>	Panel Mount
<b>Screen Size</b>	17.0" (Diagonal)
<b>Aspect Ratio</b>	5:4
<b>Native Resolution</b>	1280 x 1024 (Auto sync from 640 x 480 to 1280 x 1024)
<b>Horizontal Frequency</b>	30 kHz ~ 83 kHz
<b>Vertical Frequency</b>	56 Hz ~ 75 Hz
<b>Pixel Pitch</b>	0.264mm x 0.264mm
<b>Response Time</b>	5ms Typical
<b>Type</b>	LCD c/w LED Backlighting
<b>Video Input Connectors</b>	VGA / HD-15 DVI Compliant Digital HDCP (DVI-D)
<b>Viewing Angle</b>	170° (H) / 160° (V) - (Viewing angle of LCD panel without touch)
<b>Contrast Ratio</b>	1000:1 (typical) SmartContrast: 20,000,000:1
<b>Luminance (Brightness)</b>	250 cd/m2 typical at center (250 Nits)
<b>Viewable Image Size</b>	Horizontal: 13.39" / 340.1 mm, Vertical: 10.71" / 272.03 mm
<b>Video Signal</b>	ANALOG: 0.7 Vp-p/75 Ohms
<b>Sync Signal</b>	Separate Sync Sync on Green
<b>Input</b>	AC Input: 100-240V, 50-60Hz, 1.5A
<b>Control Buttons (Rear mounted)</b>	Smart Image, Down, Up, Menu/OK, Power ON/OFF
<b>Controls On-Screen Display</b>	Brightness, Contrast, Auto Adjust, Image Position, Image Adjust, Color Adjust, Display Mode, Language Select, OSM Lockout, OSM Time-out

<b>Environmental Rating</b>	Standard Bezel: NEMA 4 / IP65 Front Panel (when properly installed) protection against windblown dust and rain, splashing water, and hose-directed water Optional Stainless Steel Bezel: NEMA 4X / IP65 Front Panel (when properly installed) corrosion protection, protection against windblown dust and rain, splashing water, and hose-directed water
<b>Environmental</b>	Operating Temperature: 0 - 40C (32 to 104 F) Storage Temperature: -20~60C (-4~140F) Operating: Relative Humidity 20% ~ 80% Storage Relative Humidity: 20% ~ 80%
<b>Approvals</b>	cULus Listed, UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07
<b>Panel Finish</b>	Black Baked Enamel (Standard) Stainless Steel - Brushed #304 (Optional)
<b>Unit Weight</b>	Unit Weight: 14.9 Lbs (6.76 Kg)* Shipping Weight: 21.2 Lbs (9.62 Kg)* * Weight may vary depending on configuration
<b>Dimensions</b>	Panel Mount: 18.9"(W) x 17.0"(H) x 2.5"(D) 480.06mm x 431.8mm x 63.68mm
<b>Available Models</b>	SV-1701-PM-RT - Standard Bezel (NEMA 4), Resistive Touch with Serial/DB9 and USB Interface SV-1701-PM-CT-SERIAL - Standard Bezel (NEMA 4), Capacitive Touch with Serial/DB9 Interface SV-1701-PM-CT-USB - Standard Bezel (NEMA 4), Capacitive Touch Screen with USB interface SV-1701-PM-RT-SS - Stainless Steel Bezel (NEMA 4X), Resistive Touch with USB & Serial/DB9 Interfaces SV-1701-PM-CT-SS-SERIAL - Stainless Steel Bezel (NEMA 4X), Capacitive Touch with Serial/DB9 Interface SV-1701-PM-CT-SS-USB - Stainless Steel Bezel (NEMA 4X), Capacitive Touch Screen with USB & Serial/DB9 Interfaces
<b>Warranty</b>	2 Year Parts & Labor 1 Year Extended Warranty available (see Configurator/Price List)
<b>Disclaimer</b>	Note: Specifications are subject to change without notice.